

— Off-grid and hybrid solar inverters


Storage-based MPPT solar inverters

Off-grid single-phase inverters from 1 to 20 kVA, and single- and three-phase hybrid inverters from 3 to 250 kVA.

Off-grid and hybrid

Lithium-ion compatible

Class-1 supplier, Make in India

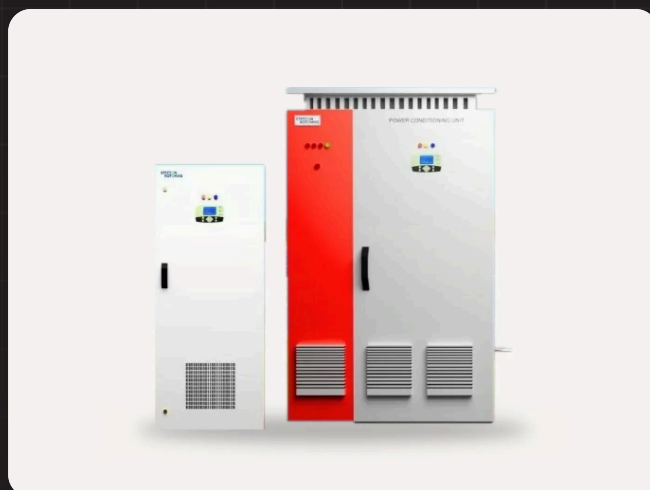

1-20 kVA

off-grid, single phase

3-250 kVA

hybrid, single and three phase

Up to 50 kVA

in single phase

<5 ms

changeover time

— About us

An Indian solar inverter manufacturer

Statcon Energiaa (P) Ltd. is an ISO 9001, 14001 and 45001 certified power electronics manufacturer, working since 1987 across solar, defence, hydrogen, power and railway solutions.

With design, R&D and software development all in-house, we build reliable, efficient and service-friendly solar inverters for Indian conditions at our manufacturing works in Pilkhuwa (Hapur, Uttar Pradesh), backed by after-sales support across India.



Power conditioning units at our manufacturing works.

— The range



Boxer hybrid inverter

Single-phase hybrid MPPT inverters, floor or wall mounted, lithium-ion compatible.

1-50 kVA · 48-360 V



HBD series hybrid inverter

Three-phase hybrid MPPT inverters for commercial and industrial sites.

5-250 kVA · 48-480 V



SEOG series MPPT inverter

Single-phase off-grid MPPT solar inverters (PCUs) built for harsh Indian weather.

2-20 kVA · 48-240 V



Bullet series MPPT inverter

Compact single-phase off-grid MPPT solar inverter.

Bullet 3024 · 2 kVA / 24 V

— Features

One machine, many possibilities

High-kVA single phase

- Ratings up to 50 kVA in single phase
- For sites such as hospitals and petrol pumps that run high-capacity single-phase machines

High surge capability

- Up to 300% short surge and 150% longer surge capability
- For motors and other jerk loads

Time-of-day (ToD) scheduling

- Uses energy arbitrage to lower energy costs
- Settable by region, for residential and commercial use

Peak shaving

- For industries that face high penalties for exceeding their sanctioned load
- Built-in support through grid import settings

100% load imbalance

- Across three-phase ratings, the inverter is built to withstand up to 100% load imbalance across all phases
- A benefit in industrial installations

— Lithium compatibility, three ways

- ✓ **RS-485 communication.** Talks to the battery BMS, for an extra layer of security
- ✓ **Soft charge protection.** A built-in pre-charge circuit protects the lithium battery from high inrush current
- ✓ **Wake-up circuit.** No need to charge the battery manually after a deep discharge; it charges automatically from PV or grid, and the inverter switches on automatically

— Our strengths

- ✓ In-house inverter design, coding and software
- ✓ End-to-end manufacturing and in-house testing
- ✓ Long-term after-sales and quick spares support

Grid power sharing

- Grid synchronisation through Active Front End technology
- Exports to the grid as soon as loads decrease

Seamless changeover

- Changeover time below 5 ms
- For sensitive equipment that cannot tolerate a stoppage

DG set replacement

- Replaces polluting DG sets with economical backup
- A mobile solution that uses solar to lower the cost per kWh

Battery compatibility

- Battery chemistry settable through the display screen
- Communicates with a smart BMS to take charging decisions

— Making the grid work smarter

- ✓ **Grid sync.** Synchronises to the grid through Active Front End technology and shares power with the AC grid, for 100% utilisation of solar power
- ✓ **Grid export control.** Enable or disable grid export to suit net-meter availability, with a simple command on the built-in display and keypad
- ✓ **Grid import control.** Limits the power drawn from the AC grid, especially useful for peak shaving

Quality control

Our QC lab has precision testing jigs, power analysers, digital meters and environmental chambers. Every unit goes through pre-QC and final inspection, supported by trained teams and a vendor quality programme.

BIS certified: select range, and the rest underway.

Boxer · single-phase hybrid solar inverter

Single-phase hybrid MPPT inverters (3–50 kVA)*

The Boxer inverter series (1–50 kVA) integrates grid-tie and storage functions for uninterrupted power. Engineered for unreliable grids and rising energy costs, it stores, exports or blends solar power through behind-the-meter control, with **floor or wall-mount options** and customisable lithium-ion compatibility.

Lithium-ion battery compatible. BIS approved (R-93031208).

Ratings*

3–10 kVA · 48 V

5–7.5 kVA · 96 V

8–15 kVA · 120 V

15–50 kVA · 240 V

40–50 kVA · 360 V

* Other customised ratings are available on request.

All Boxer models

General specifications

E. Miscellaneous			
Switchgear protection	MCB/MCCB provided on PV, battery, load and grid path	LED indications	Mains on, alarm, buzzer mute
Data port (RS-485 / RS-232)	Optional (available on request)	Remote monitoring	Optional, through GPRS-based modem
Ingress protection	IP20 (indoor type)	Cooling method	Forced cooled (temperature controlled)
Operating temperature	0–50 °C (without derating)	Humidity	Max. 95%, non-condensing
Altitude	1000 m above sea level	Colour shade	RAL 7035 / DA grey HE 15005

Protections		Display parameters
D. Protections and display parameters		
PV side	Reverse polarity, PV power limit, surge protection (MOV)	Voltage, charger output amps, power, cumulative energy
Battery side	Reverse polarity, over/under voltage, current limit	Voltage, current, battery state
Grid side	Over/under voltage, over/under frequency, surge protection (MOV)	Phase voltage, frequency, power, power factor
Load side	Overloads, short circuit, surge protection (MOV)	Voltage and current, frequency, power, export kWh
System protection	Over-temperature	Mode of operation, active faults, status mimic



— Single phase, low voltage (48 V)

Boxer hybrid MPPT inverters, 1–10 kVA

	1 kVA / 48 V	2 kVA / 48 V	3 kVA / 48 V	4 kVA / 48 V	5 kVA / 48 V	6 kVA / 48 V	8 kVA / 48 V	10 kVA / 48 V
Model number	BOX-048-01K-1P	BOX-048-2K-1P	BOX-048-03K-1P	BOX-048-04K-1P	BOX-048-05K-1P	BOX-048-06K-1P	BOX-048-08K-1P	BOX-048-10K-1P
A. MPPT charger								
Type (buck)	MPPT							
Max. PV input power (total kWp)	1.2	2.4	3.6	4.8	6	7.2	9.6	12
Max. PV strings in parallel	1	2	3	4	5	6	8	10
No. of MPPT channels / inputs	1/1							
Max. open-circuit PV volts (Voc)	190 V							
MPPT voltage range (Vmp)	75–160 V							
Max. output current (A)	23	46	70	94	117	141	188	235
Peak charging efficiency	92%				94%			
B. Solar inverter								
Nominal capacity	1 kVA	2 kVA	3 kVA	4 kVA	5 kVA	6 kVA	8 kVA	10 kVA
Output current (A)	3.5	7	10	14	17	21	28	35
Battery voltage	48 V							
Output voltage / frequency / phase	230 V (±2%) / 50 Hz / 1P+N							
Load power factor	0.8 to unity							
Peak efficiency	>86%				>88%			
Overloads: 60 s / 30 s / 5 s	101–110% / 111–125% / 126–150%							
Auto bypass	Provided							
Anti-islanding / power export to grid	Provided (as per IEC 62116 and IEC 61727)							
C. Grid charger								
Grid voltage range	230 V (+10% / –20%)							
Grid frequency range	50 Hz (+5% / –5%)							
Max. grid import power	1.5 kVA	3 kVA	4.5 kVA	6 kVA	7.5 kVA	9 kVA	12 kVA	15 kVA

Protections, display parameters and general specifications (sections D and E) are common to all Boxer models; see the Boxer series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

— Single phase, high voltage (96 / 120 / 240 V)

Boxer hybrid MPPT inverters, 5–15 kVA

	5 kVA / 96 V	6 kVA / 96 V	7.5 kVA / 96 V	8 kVA / 120 V	10 kVA / 120 V	15 kVA / 120 V	15 kVA / 240 V
Model number	BOX-096-05K-1P	BOX-096-06K-1P	BOX-096-07K5-1P	BOX-120-08K-1P	BOX-120-10K-1P	BOX-120-15K-1P	BOX-240-15K-1P
A. MPPT charger							
Type (buck)	MPPT						
Max. PV input power (total kWp)	6	7.2	9	9.6	12	18	18
Max. PV strings in parallel	3	4	5	5	6	9	5
No. of MPPT channels / inputs	1/1						
Max. open-circuit PV volts (Voc)	320 V		320 V			650 V	
MPPT voltage range (Vmp)	165–280 V		165–280 V			330–570 V	
Max. output current (A)	59	70	87	74	94	141	70
Peak charging efficiency	94%						
B. Solar inverter							
Nominal capacity	5 kVA	6 kVA	7.5 kVA	8 kVA	10 kVA	15 kVA	15 kVA
Output current (A)	17	21	28	28	35	52	52
Battery voltage	96 V		120 V			240 V	
Output voltage / frequency / phase	230 V (±2%) / 50 Hz / 1P+N						
Load power factor	0.8 to unity						
Peak efficiency			>88%		>90%		
Overloads: 60 s / 30 s / 5 s	101–110% / 111–125% / 126–150%						
Auto bypass	Provided						
Anti-islanding / power export to grid	Provided (as per IEC 62116 and IEC 61727)						
C. Grid charger							
Grid voltage range	230 V (+10% / –20%)						
Grid frequency range	50 Hz (+5% / –5%)						
Max. grid import power	7.5 kVA	9 kVA	11.25 kVA	12 kVA	15 kVA	22.5 kVA	22.5 kVA

Protections, display parameters and general specifications (sections D and E) are common to all Boxer models; see the Boxer series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

— Single phase, high voltage (240 / 360 V)

Boxer hybrid MPPT inverters, 20–50 kVA

	20 kVA / 240 V	25 kVA / 240 V	30 kVA / 240 V	40 kVA / 240 V	50 kVA / 240 V	40 kVA / 360 V	50 kVA / 360 V
Model number	BOX-240-20K-1P	BOX-240-25K-1P	BOX-240-30K-1P	BOX-240-40K-1P	BOX-240-50K-1P	BOX-360-40K-1P	BOX-360-50K-1P
A. MPPT charger							
Type (buck)	MPPT						
Max. PV input power (total kWp)	24	30	36	48	60	48	60
Max. PV strings in parallel	6	8	9	12	15	8	10
No. of MPPT channels / inputs	1/1						
Max. open-circuit PV volts (Voc)	650 V 820 V						
MPPT voltage range (Vmp)	330–570 V 495–681 V						
Max. output current (A)	95	119	142	190	237	127	157
Peak charging efficiency	95%						
B. Solar inverter							
Nominal capacity	20 kVA	25 kVA	30 kVA	40 kVA	50 kVA	40 kVA	50 kVA
Output current (A)	70	87	104	139	174	139	174
Battery voltage	240 V 360 V						
Output voltage / frequency / phase	230 V (±2%) / 50 Hz / 1P+N						
Load power factor	0.8 to unity						
Peak efficiency	>91%						
Overloads: 60 s / 30 s / 5 s	101–110% / 111–125% / 126–150%						
Auto bypass	Provided						
Anti-islanding / power export to grid	Provided (as per IEC 62116 and IEC 61727)						
C. Grid charger							
Grid voltage range	230 V (+10% / –20%)						
Grid frequency range	50 Hz (+5% / –5%)						
Max. grid import power	30 kVA	37.5 kVA	45 kVA	60 kVA	75 kVA	60 kVA	75 kVA

Protections, display parameters and general specifications (sections D and E) are common to all Boxer models; see the Boxer series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

— HBD series · three-phase hybrid solar inverter

Three-phase hybrid MPPT inverters (5–250 kVA)*

The HBD series (5–250 kVA) offers hybrid solar inverters for businesses and industries (C&I). Designed for unreliable grids and power cuts, it combines grid-tie and storage functions, storing energy in batteries, exporting surplus to the grid, or operating independently through its behind-the-meter system.

Lithium-ion battery compatible.

Ratings*

5–15 kVA · 48 V

10–15 kVA · 120 V

15–100 kVA · 240 V

30–200 kVA · 360 V

125–250 kVA · 480 V

250 kVA · 576 V

* Other customised ratings are available on request.

— All HBD models

General specifications

E. Miscellaneous			
Switchgear protection	MCB/MCCB provided on PV, battery, load and grid path	LED indications	Mains on, alarm, buzzer mute
Data port (RS-485 / RS-232)	Optional (available on request)	Remote monitoring	Optional, through GPRS-based modem
Ingress protection	IP20 (indoor type)	Cooling method	Forced cooled (temperature controlled)
Operating temperature	0–50 °C (without derating)	Humidity	Max. 95%, non-condensing
Altitude	1000 m above sea level	Colour shade	RAL 7035 / DA grey HE 15005

Protections		Display parameters
D. Protections and display parameters		
PV side	Reverse polarity, PV power limit, surge protection (MOV)	Voltage, charger output amps, power, cumulative energy
Battery side	Reverse polarity, over/under voltage, current limit	Voltage, current, battery state
Grid side	Over/under voltage, over/under frequency, surge protection (MOV)	Phase voltage, frequency, power, power factor
Load side	Overloads, short circuit, surge protection (MOV)	Voltage and current, frequency, power, export kWh
System protection	Over-temperature	Mode of operation, active faults, status mimic



— Three phase, low voltage (48 V)

HBD series hybrid MPPT inverters, 5–15 kVA

	5 kVA / 48 V	8 kVA / 48 V	10 kVA / 48 V	15 kVA / 48 V
Model number	HBD-048-05K-3P	HBD-048-008K-3P	HBD-048-010K-3P	HBD-048-015-3P
A. MPPT charger				
PV nominal capacity (total kWp)	5	8	10	15
Max. no. of strings	5	8	10	15
Charge controller type (buck)	MPPT			
No. of MPPT channels / inputs	1/1			
Max. open-circuit PV volts (Voc)	190 V			
MPPT voltage range (Vmp)	75–160 V			
Max. SCC output amps	100	160	200	300
Peak charging efficiency	94%			
B. Solar inverter				
Nominal capacity (total)	5 kVA	8 kVA	10 kVA	15 kVA
Output amps per phase	6	9	12	17
Nominal battery voltage	48 V			
Output voltage / frequency / phase	400 V (±2%) / 50 Hz / 3P+N			
Load power factor	0.8 to unity			
Peak efficiency	>86%		>88%	
Overloads: 60 s / 30 s / 5 s	101–110% / 111–125% / 126–150%			
Auto bypass	Provided			
Anti-islanding / power export to grid	Provided (as per IEC 62116 and IEC 61727)			
C. Grid charger				
Grid voltage operating range	400 V (+10% / –20%)			
Grid frequency operating range	50 Hz (+5% / –5%)			
Max. grid import power	7.5 kVA	12 kVA	15 kVA	22.5 kVA
Dimensions (H x W x D, mm)	750 x 530 x 897.45			

Protections, display parameters and general specifications (sections D and E) are common to all HBD models; see the HBD series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

— Three phase, high voltage (120 / 240 / 360 V)

HBD series hybrid MPPT inverters, 10–50 kVA

	10 kVA / 120 V	15 kVA / 120 V	15 kVA / 240 V	20 kVA / 240 V	25 kVA / 240 V	30 kVA / 240 V, 360 V	40 kVA / 240 V, 360 V	50 kVA / 240 V, 360 V
Model number	ECO-HBD-120-010K-3P	ECO-HBD-120-015K-3P	ECO-HBD-240-15K-3P	ECO-HBD-240-25K-3P	ECO-HBD-240-25K-3P	ECO-HBD-240-30K-3P ECO-HBD-360-30K-3P	ECO-HBD-240-40K-3P ECO-HBD-360-40K-3P	ECO-HBD-240-50K-3P ECO-HBD-360-50K-3P
A. MPPT charger								
PV nominal capacity (total kWp)	10	15	15	20	25	30	40	50
Max. no. of strings	6	9	5	6	8	9/6	12/8	15/10
Charge controller type (buck)	MPPT							
No. of MPPT channels / inputs	1/1							
Max. open-circuit PV volts (Voc)	320 V		650 V			650/820 V		
MPPT voltage range (Vmp)	165–280 V		330–570 V			330–570 / 495–681 V		
Max. SCC output amps	80	120	60	80	100	120/80	160/108	200/135
Peak charging efficiency	94%							
B. Solar inverter								
Nominal capacity	10 kVA	15 kVA	15 kVA	20 kVA	25 kVA	30 kVA	40 kVA	50 kVA
Output amps per phase	12	17	17	23	29	35	46	58
Nominal battery voltage	120 V		240/360 V					
Output voltage / frequency / phase	400 V (±2%) / 50 Hz / 3P+N							
Load power factor	0.8 to unity							
Peak efficiency	>89%		>90%			>92%		
Overloads: 60 s / 30 s / 5 s	101–110% / 111–125% / 126–150%							
Auto bypass	Provided							
Anti-islanding / power export to grid	Provided (as per IEC 62116 and IEC 61727)							
C. Grid charger								
Grid voltage operating range	400 V (+10% / –20%)							
Grid frequency operating range	50 Hz (+5% / –5%)							
Max. import power	15 kVA	22.5 kVA	22.5 kVA	30 kVA	37.5 kVA	45 kVA	60 kVA	75 kVA
Dimensions (H x W x D, mm)	700 x 550 x 845	800 x 550 x 845				900 x 650 x 965		

Protections, display parameters and general specifications (sections D and E) are common to all HBD models; see the HBD series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

— Three phase, high voltage (240 / 360 / 480 / 576 V)

HBD series hybrid MPPT inverters, 60–250 kVA

	60 kVA / 240 V, 360 V	80 kVA / 240 V, 360 V	100 kVA / 240 V, 360 V	125 kVA / 360 V, 480 V	150 kVA / 360 V, 480 V	200 kVA / 360 V, 480 V	250 kVA / 480 V
Model number	ECO-HBD-240-60K-3P ECO-HBD-360-60K-3P	ECO-HBD-240-80K-3P ECO-HBD-360-80K-3P	ECO-HBD-240-100K-3P ECO-HBD-360-100K-3P	ECO-HBD-360-125K-3P ECO-HBD-480-125K-3P	ECO-HBD-360-150K-3P ECO-HBD-480-150K-3P	ECO-HBD-360-200K-3P ECO-HBD-480-200K-3P	ECO-HBD-480-250K-3P
A. MPPT charger							
PV nominal capacity (total kWp)	60	80	100	125	150	200	250
Max. no. of strings (per channel)	6/4	8/5	10/6	8/7	10/10	14/13	12/9
Charge controller type (buck)	MPPT						
No. of MPPT channels / inputs	3/3						4/4
Max. open-circuit PV volts (Voc)	650/820 V		820/900 V			900 V	
MPPT voltage range (Vmp)	330–570 / 495–681 V			495–681 / 660–800 V			660–800 V
Max. SCC output amps	235/157	314/209	392/261	326/245	392/294	522/392	490
Peak charging efficiency	94%						
B. Solar inverter							
Nominal capacity	60 kVA	80 kVA	100 kVA	125 kVA	150 kVA	200 kVA	250 kVA
Output amps per phase	69	92	115	144	173	231	289
Nominal battery voltage	240/360 V			360/480 V			480 V
Output voltage / frequency / phase	400 V (±2%) / 50 Hz / 3P+N						
Load power factor	0.8 to unity						
Peak efficiency	>92%			>94%			
Overloads: 60 s / 30 s / 5 s	101–110% / 111–125% / 126–150%					101–110% / 111–120% / 121–130%	
Auto bypass	Provided						
Anti-islanding / power export to grid	Provided (as per IEC 62116 and IEC 61727)						
C. Grid charger							
Grid voltage operating range	400 V (+10% / –20%)						
Grid frequency operating range	50 Hz (+5% / –5%)						
Max. import power	90 kVA	120 kVA	150 kVA	188 kVA	225 kVA	250 kVA	300 kVA
Dimensions (H x W x D, mm)	1650 x 800 x 850		1900 x 800 x 1050		2125 x 1200 x 1200		

Protections, display parameters and general specifications (sections D and E) are common to all HBD models; see the HBD series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

— SEOG series and Bullet series · off-grid

Single-phase MPPT solar inverters (1-20 kVA)

Built for harsh Indian weather conditions, our MPPT-based PCU manages renewable solar power, grid supply and battery to deliver power for all electrical applications, reducing diesel consumption and electricity bills, 365 days a year.

Ratings*

1 kVA · 24 V

1-6 kVA · 48 V

5-7.5 kVA · 96 V

5-15 kVA · 120 V

15-20 kVA · 240 V

* Other customised ratings are available on request.



— SEOG and Bullet models

General specifications

E. Miscellaneous

Switchgear protection	MCB/MCCB provided in PV, battery, load and grid path	Remote monitoring	GPRS-based modem (at extra cost)
Data port (RS-485 / RS-232)	Optional (available on request)	Ingress protection	IP20 (indoor type)
Operating temperature	0-50 °C (without derating)	Type of cooling	Forced cooled (temperature controlled)
Humidity	Max. 95%, non-condensing	Altitude	1000 m above sea level
LED indications	Power on, inverter on, solar present/charging, load on grid, charging, battery low, system trip		

Protections

Display parameters

D. Protections and display parameters

PV side	Reverse polarity, PV overload, surge protection (MOV)	Voltage, current, power, energy
Battery side	Reverse polarity, over/under voltage, current limit	Voltage, current, battery charging/discharging
Grid side	Over/under voltage, over/under frequency, surge protection (MOV)	Voltage, frequency
Load side	Over/under voltage, overloads, short circuit, surge protection (MOV)	Voltage, current, frequency, load %
Miscellaneous	Over-temperature	Mode of operation, faults

— Single phase, 24 / 48 / 96 / 120 / 240 V

Bullet and SEOG series MPPT inverters, 2–20 kVA

	2 kVA / 24 V	2 kVA / 48 V	3 kVA / 48 V	5 kVA / 48 V	6 kVA / 48 V	5 kVA / 96 V	7.5 kVA / 96 V	10 kVA / 120 V	12.5 kVA / 120 V	15 kVA / 120 V	15 kVA / 240 V	20 kVA / 240 V
Model number	Bullet 3024	SEOG- 048- 2K0-1P	SEOG- 048- 3K0-1P	SEOG- 048- 5K0-1P	SEOG- 048- 6K0-1P	SEOG- 096- 5K0-1P	SEOG- 096- 7K5-1P	SEOG- 120- 10K0-1P	SEOG- 120- 12K5-1P	SEOG- 120- 15K0-1P	SEOG- 240- 15K0-1P	SEOG- 240- 20K0-1P
A. MPPT charger												
Type (buck)	MPPT											
PV nominal capacity (kWp)	2	2	3	5	6	5	7.5	10	10	15	15	20
Max. PV strings in parallel	2	2	3	5	6	3	5	6	6	9	5	6
No. of MPPT channels / inputs	1/1											
Max. open-circuit voltage (Voc)	110 V	190 V				320 V			320 V		650 V	
MPPT tracking range (Vmp)	35–88 V	75–160 V				165–280 V			165–280 V		330–570 V	
Max. output current (A)	40	40	60	100	120	50	75	80	80	120	60	80
Peak charging efficiency	≥94%						≥94%					
B. Solar inverter												
Nominal capacity (kVA)	2	2	3	5	6	5	7.5	10	12.5	15	15	20
Output current (A)	8.0	7.0	10.4	17.4	20.8	17.5	26	35	43.5	52	52	70
Battery voltage (V)	24	48				96		120	120		240	
Output voltage / frequency / phase	220 V						230 V (±2%) / 50 Hz / 1P+N					
Peak efficiency	≥88%											
Overloads: 60 s / 30 s / 5 s	101–110% / 111–150% / 151–200%											
Auto bypass	Provided											
C. Grid charger												
Grid voltage range	120–280 V											
Grid frequency range	50 Hz (+5% / –5%)											
Max. grid import power (kVA)	3	3	4.5	7.5	9	7.5	11.25	15	18.7	22.5	22.5	30
E. Miscellaneous												
Colour shade	Green/white						Black					

Protections, display parameters and the remaining general specifications (sections D and E) are listed on the SEOG and Bullet series page.

Statcon Energiaa Pvt. Ltd. reserves the right to modify or withdraw any of the ratings or technical specifications.

Monitoring

Smart power, smarter monitoring

- ✓ Access live solar data, anytime and anywhere
- ✓ Monitor voltage, current, grid import/export and battery status
- ✓ View daily, monthly and lifetime energy analytics
- ✓ Receive performance alerts and efficiency reports
- ✓ Works on both mobile and desktop
- ✓ Cloud sync, real-time data, alerts and analytics, with 24x7 visibility



Inverter assemblies in production at our manufacturing works.

Why Statcon Energiaa

- ✓ Solar inverters and energy storage systems from 1 to 250 kVA
- ✓ Our PCUs handle heavy loads, above 100% of labelled wattage
- ✓ Store energy for use at any time, for a seamless experience
- ✓ In-house design and manufacturing
- ✓ Our own transformer manufacturing

Service

No-hassle service promise

We provide a **minimum TAT** guarantee through our channel partners, for quick replacement and minimum downtime of your solar system.

Three-step service flow

- **Call support.** Customer care toll-free number 1800-891-3319; email servicing@energiaa.in
- **Remote diagnosis.** 80% of issues are solved through a remote check, quickly and transparently
- **Minimum TAT guarantee.** Service pairs and standby units for faster TAT and minimal downtime

Why it works

- Minimum downtime
- Nationwide network
- Free-of-cost standby support
- Factory-backed reliability
- Made in India

Join our solar channel network

Corporate office: B-81, Sector 63, Noida, G.B. Nagar, Uttar Pradesh, India.

Toll-free 1800-891-3319 · info@energiaa.in · www.energiaa.in

Statcon Energiaa works across five divisions: solar, power, defence, railways and hydrogen.